

**Saci Pool pump fibreglass-
reinforced PP 63 mm glue
socket 4,2A 230VAC black type
Winner 50M 0.5HP (7007680)**



TECHNICAL SPECIFICATIONS

Colour	black
Shaft	stainless steel 316
Pump body	fibreglass-reinforced PP
Material impeller 1	noryl
Material seal	stainless steel 316
Connection	glue socket
Max. temperature	40 °C
Width	220 mm
Height	325 mm
Frequency	50 Hz
Maximum ambient temperature	40 °C
IP value	IP55
Motor RPM	2900
Type	Winner 50M
Capacity	4 -12 m ³ /h
Output Power	0,5 HP
Max. head	17,7 m

Size 63 mm

Length 550 mm

Voltage 230VAC

Weight 11.7 kg

Power 0.37 kW

Ampere 4,2 A

BEP Capacity 13.5

BEP Head 8



Packaging dimensions L/W/H 630 x 230 x 360 mm

DIMENSIONS

A 550 mm

B 220 mm

C 325 mm

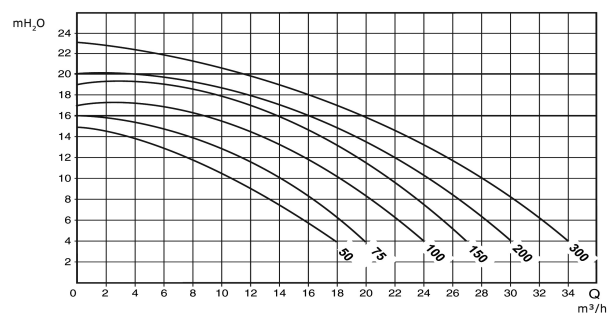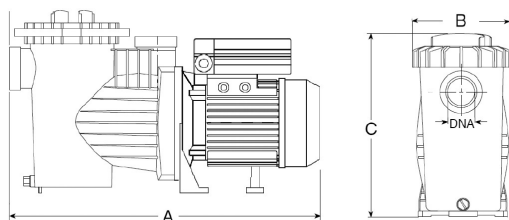

PRODUCT INFORMATION

Self-priming pump for all sizes of domestic pools. The pump comes with a large pre-filter which, combined with excellent hydraulic performance, has a very large filter capacity. The transparent polycarbonate allows easy inspection of the filter pump due to its easy opening mechanism.

Features:

- Connection: 2" female thread
- Union connection: Glue socket 63mm
- Transparent polycarbonate lid
- Large filter
- Insulation: Class F
- Protection: IP55
- Mechanical Seals: Carbon/ceramic/stainless steel AISI 316
- Shaft: AISI 316
- Impeller: Noryl

Last modified date: 24/05/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>