

Grundfos Multi-stage centrifugal pump stainless steel DN35 DIN flange 2,5A 400VAC type CRI 1-23 A FGJ I V HQQV (7039667)



GRUNDFOS 

TECHNICAL SPECIFICATIONS

Material	stainless steel
Shaft	stainless steel 316
Pump body	stainless steel 316
Material impeller 1	stainless steel 304
Connection	DIN flange
Voltage	400VAC
Temperature range	-20°C - 90°C
Maximum ambient temperature 40 °C	
Minimum ambient temperature 0 °C	
Type	CRI 1-23 A FGJ I V HQQV
Output Power	1.5 HP
Size	DN35
Power	1.1 kW
Impellers	23
MWC	140
Ampere	2,5 A
Max flow rate	2.4 m ³ /h

Efficiency 82,7 %

Press 35

Motor RPM 2770

DIMENSIONS

L 250 mm

H-1 899 mm



W-1 210 mm

ØDi-1 35 mm

ØDi-2 35 mm

Cb-1 75 mm

Cb-2 75 mm

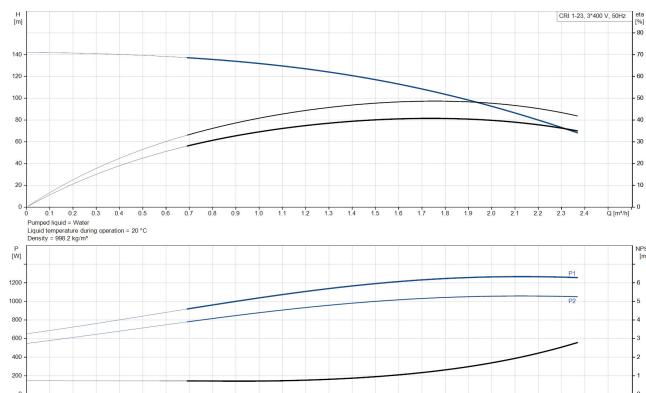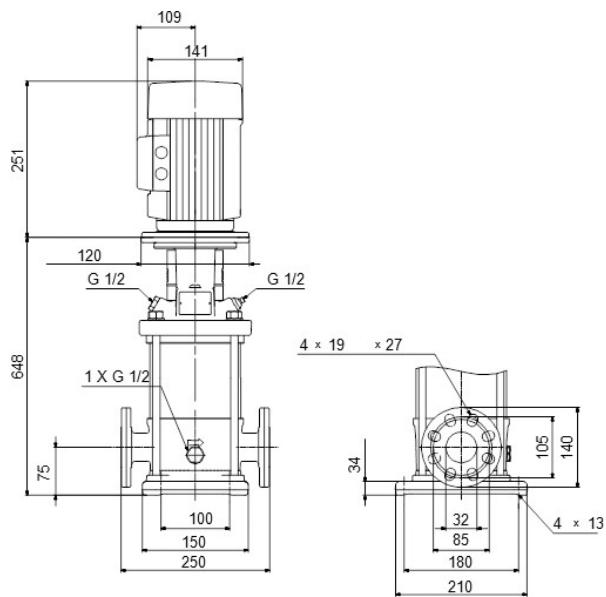

PRODUCT INFORMATION

Grundfos CRI pumps are vertical, non-self-priming, multistage, in-line, centrifugal pumps for installation in pipe systems and mounting on a foundation, suitable for industrial applications. This design provides a more compact pump design and pipework. CR pumps are designed for a variety of applications ranging from the pumping of potable water to the pumping of chemicals. The pumps are therefore suitable for a wide range of pumping systems where the performance and material of the pump meet specific demands.

Last modified date: 12/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>