

**DAB Pressure set KIWA  
compliant PP 1" female thread  
7,5bar 4,8A 230VAC green type  
ESYBOX Mini 3 (7043397)**



# TECHNICAL SPECIFICATIONS

Colour green

Material PP

Pump body PP

Material (spring) stainless steel 303

Material impeller 1 noryl

Connection female thread

Voltage 230VAC

Max. temperature 40 °C

Minimum medium temperature 0 °C  
(continuous)

Maximum ambient temperature 50 °C

Pressure 7,5 bar

Type ESYBOX Mini 3



Max. head 55 m

Tank 1 ltr

Size 1"

Power 0.85 kW

Impellers	3
Ampere	4,8 A
Max flow rate	4.8 m <sup>3</sup> /h
BEP Capacity	39.7
BEP Head	2.61
PORlh	52.8
PORhh	35.3
PORlq	1.827
PORhq	3.132

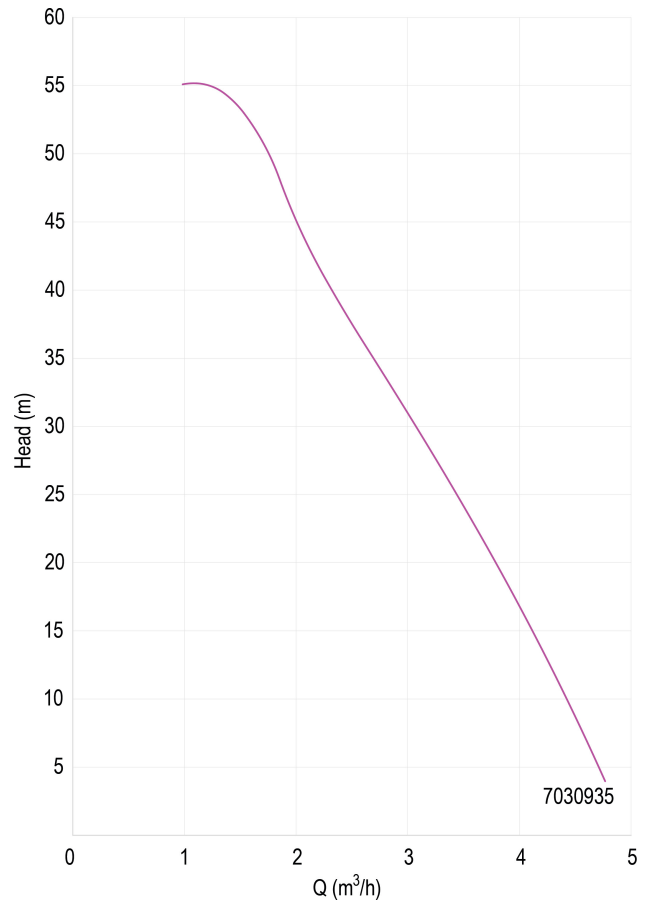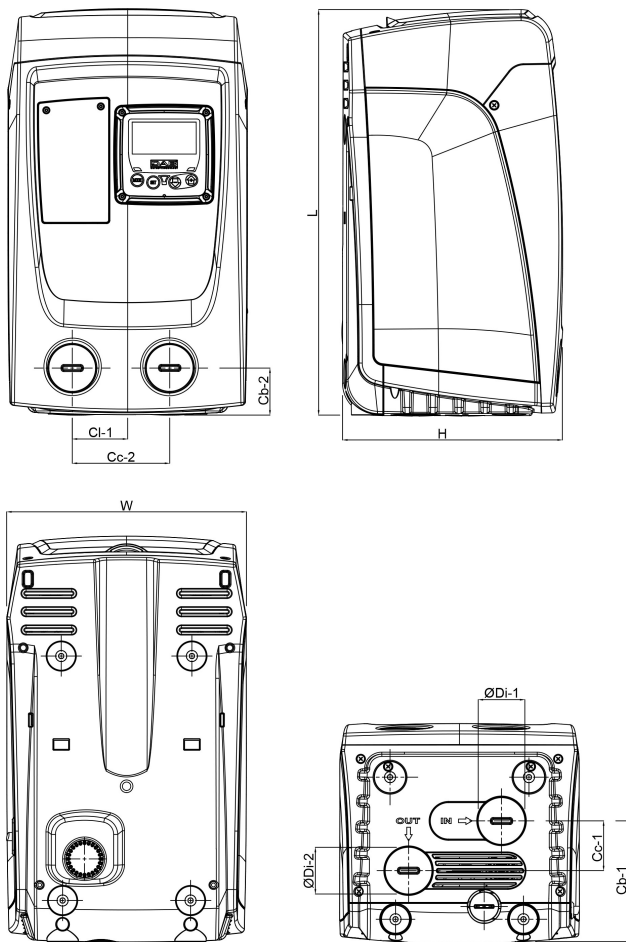

## PRODUCT INFORMATION

This Esybox Mini 3 pressure booster is specifically designed for use in drinking water installations and features a built-in safety device that automatically stops the pump when the pressure drops below 0.5 bar. Includes a self-priming multi-stage pump, management inverter electronics, pressure and flow sensors, adjustable high resolution LCD display with 1 litre built-in expansion vessel, and cartridge check valve. Suitable for use with potable water, in domestic systems and gardening applications. Pressure Set Point adjustable from 1 up to 5.5 bar. Max. Suction Depth: 8 metres. Installation: Horizontal or vertical fixed position

**Last modified date: 27/05/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>