

Norsup Sand filter fibreglass reinforced polyester 50 mm glue socket 2,5bar grey type SupraV3 500 SM (7035852)



 **NORSUP** 3 YEARS WARRANTY
5 YEARS VALVE
10 YEARS TANK

TECHNICAL SPECIFICATIONS

| | |
|----------------|---------------------------------|
| Colour | grey |
| Material | fibreglass reinforced polyester |
| Connection | glue socket |
| Pressure | 2,5 bar |
| Max. temp. | 50 °C |
| Type | SupraV3 500 SM |
| Capacity | 10 m ³ /h |
| Size | 50 mm |
| Diameter | 500 mm |
| Weight | 21 kg |
| Sand | 100 kg |
| Filter area | 0.2 m ² |
| Max. pool vol. | 60 m ³ |

DIMENSIONS

| | |
|---|--------|
| A | 946 mm |
| B | 125 mm |


C 455 mm

D 520 mm

E 450 mm

F 90 mm

G 520 mm

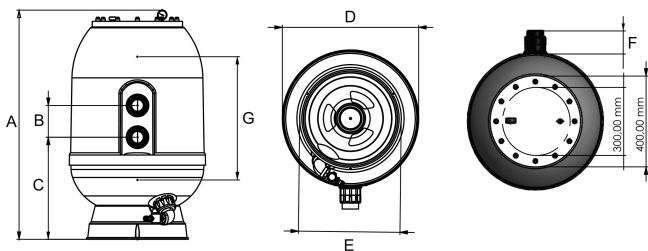

PRODUCT INFORMATION

The Norsup filter type Supra is made of sturdy fibreglass reinforced polyester with a weather-resistant gel coat. Due to the 290mm wide opening, sand changes can be carried out without any difficulty. Using the twelve threaded bolts, the transparent cover can be securely screwed to the filter body. The transparent cover helps determine how much dirt is in the filter.

Features:

- Exclusively from Bevo/Bosta
- High quality fibreglass reinforced polyester
- UV-resistant
- 290mm opening for easy sand change
- Maximum working pressure up to 3 bar
- Praher 6-way valve included
- 10 years tank warranty + 5 years valve warranty
- Certified according to DIN-EN 16713

Last modified date: 11/03/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>