

DAB Submersible borehole pump stainless steel 304 1" female thread 5,1A 230VAC with 15m cable and control box booster type Micra 75M oil cooling (7030893)



TECHNICAL SPECIFICATIONS

Material stainless steel 304

Pump body stainless steel 304

Material impeller 1 noryl GFN2

Connection female thread

Type oil cooling

Voltage 230VAC

Max. temperature 35 °C

Outer ø 74 mm

Minimum medium temperature 0 °C
(continuous)

Max flow rate 2.7 m³/h

Press 1 "

BEP Capacity 1.8

IP value IP68

Type Micra 75M

Output Power 0,75 HP

Model with 15m cable and control box booster

Max. head	68 m
-----------	------

Size	1"
------	----

Weight	10.2 kg
--------	---------

Power	0.55 kW
-------	---------

Impellers	23
-----------	----

Ampere	5,1 A
--------	-------

BEP Head	42
----------	----

PORlh	52.9
-------	------

PORhh	30.3
-------	------

PORlq	1.3
-------	-----

PORhq	2.2
-------	-----




DIMENSIONS

Db	74 mm
----	-------


H-1	1145 mm
-----	---------

ØDi-1	1 "
-------	-----

ØDi-1

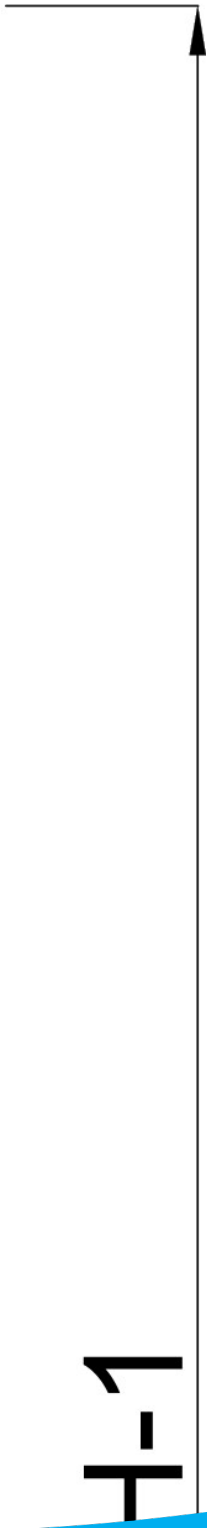

H-1

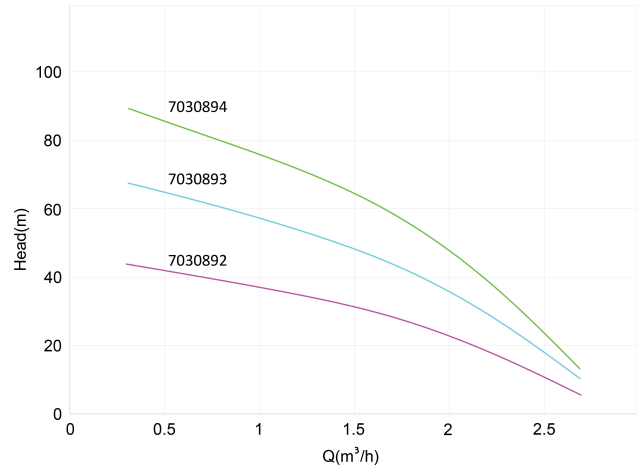

PRODUCT INFORMATION

Includes assembled 15m cable and control box booster.

Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, and chemically neutral, with properties similar to water.

Maximum permitted amount of sand: 40 g/m³.

Installation: in 3" wells or larger, tanks and cisterns, vertical position. In case of horizontal installation, ensure a minimum load on the thrust assembly.

Last modified date: 26/05/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>